


## PAROC Pro Section 100 G4

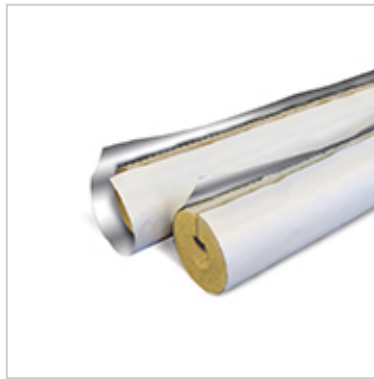

### Short Description

Stone wool pipe section with a white glass fiber cloth with aluminum foil below.

### Application

Fire and thermal insulation for pipes and ducts on ships.

The notified body Eurofins Expert Services Ltd. (0809) performed and issued the certificates: Type-Examination (Module B) certificate No. VTT-C-6624-15-11

### Nominal Density

100 kg/m<sup>3</sup>

Maximum service temperature for PAROC Pro Section 100 G4 is 250°C. Surface temperature of the facing must not exceed 80°C (temperature restriction determined in accordance with heat resistance adhesive). PAROC stone wool products are capable of withstanding high temperatures. The binder starts to evaporate when its temperature exceeds approximately 200°C. The insulating properties remain unchanged, but the compressive stress weakens. The softening temperature of stone wool products is over 1000°C.

## Dimensions

Dimensions		
Thickness	Inner Diameter	Pipe Section Length
20 - 100 mm	12 - 273 mm	1200 mm
In accordance with EN 13467	In accordance with EN 13467	In accordance with EN 13467

### Other Dimensions

Other dimensions available on request.

## Packaging

### Package Type

Plastic packs on pallet

## Fire Properties

Other Fire Properties		
Property	Value	According to
Fire Classification (IMO)	Non-combustible	IMO FTP Code Part 1
Surface Flammability (IMO)	Low flame-spread characteristics	IMO FTP Code Part 2 and 5
Combustibility	Base product non-combustible	EN ISO 1182

## Thermal Properties

Thermal Conductivity (values announced by manufacturer)		
Property	Value	According to
Thermal Conductivity in 50 °C, $\lambda_{50}$	0,039 W/mK	EN ISO 8497
Thermal Conductivity in 100 °C, $\lambda_{100}$	0,045 W/mK	EN ISO 8497
Thermal Conductivity in 200 °C, $\lambda_{200}$	0,064 W/mK	EN ISO 8497
Thermal Conductivity in 300 °C, $\lambda_{300}$	0,092 W/mK	EN ISO 8497

Values announced by the manufacturer.

## Moisture Properties

Water Permeability		
Property	Value	According to
Water Absorption, Short Term WS, $W_p$	$\leq 1 \text{ kg/m}^2$	EN 13472

Head Office: PAROC GROUP, P.O. Box 240 (Energiakuja 3), FI-00181 Helsinki Finland, Tel. +358 46 876 8000, [www.paroc.com](http://www.paroc.com)

The information in this brochure describes the conditions and technical properties of the disclosed products, valid at the time of publication of this document and until replaced by the next printed or digital version. The latest version of this brochure is always available on the Paroc website. Our information material presents applications for which the functions and technical properties of our products have been approved. However, the information does not mean a commercial guarantee. We do not assume liability of the use of third party components used in the application or the installation of our products. We cannot warrant the suitability of our products if used in an area or conditions which are not provided in our information material. As a result of constant further development of our products we reserve the right to make alterations to our information material at any time. PAROC is a registered trademark of Paroc Group. This data sheet is valid in following countries: international use (general information).